

Positionierzylinder ISO 15552 - Serie 6PF

Produktcode: 6PF3P063A0100

Datenblatt Erstellungsdatum: 20.05.26 22:26


Überprüfen Sie das aktualisierte Dokument  [klicken](#)



TECHNISCHE DATEN

Serie	6PF
Funktion	3 = doppeltwirkend, Leichtlaufversion
Materialien	P = Stange aus verchromtem Stahl, Profilrohr aus eloxiertem Aluminium, Dichtungen aus NBR, Muttern und Zugstangen aus verzinktem Stahl und Stangendichtung aus NBR
Diameter (mm)	63
Bauart	A = Standard mit Kolbenstangenmutter
Hub (mm)	100
Kolbenstange verlängert (mm)	0
Opzioni guarnizioni	= standard
Atex	= standard

Produktcode: 6PF3P063A0100

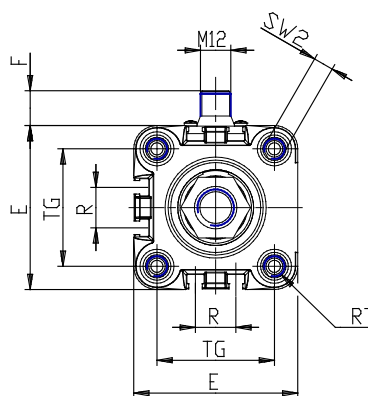

A diagram showing a circle with a horizontal and vertical axis. Inside the circle, a square is inscribed with its sides parallel to the axes. A blue arc is drawn, starting from the top-left corner of the square, passing through the top-left point of the circle, and ending at the top-right corner of the square.

SW2

Ø80-100

MM (mm)	20
KK	M16x1,5
B (mm)	45
PL (mm)	21.0
L1 (mm)	26
AM (mm)	32
VA (mm)	4
EE	G3/8
WH (mm)	37
L2 (mm)	121
L3 (mm)	5
ZJ (mm)	158
VD (mm)	6
N (mm)	36.5
BG (mm)	16.0
RT	M8
F (mm)	14
G (mm)	8.0
H (mm)	24
TG (mm)	56.5
R (mm)	28
E (mm)	75.0
SW1 (mm)	17

SW2 (mm)	8
SW3 (mm)	3
SW4 (mm)	24
Dämpfungsweg (mm)	22